



VC1N4148WTB

FAST SWITCHING DIODES

Features

- Fast switching speed
- Ultra-small surface mount package
- For general purpose switching applications
- High conductance

Marking Code: T4







SOD-523

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Reverse Voltage	V_R	100	V
Average Rectified Forward Current	$I_{F(AV)}$	150	mA
Forward Continuous Current	I_{FM}	300	mA
Power Dissipation	P_{tot}	150	mW
Thermal Resistance Junction to Ambient Air	$R_{\theta ja}$	833	$^\circ\text{C/W}$
Operating Temperature Range	T_j	- 65 to + 150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$


Parameter	Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 1\ \mu\text{A}$	$V_{(BR)R}$	100	-	V
Forward Voltage at $I_F = 1\ \text{mA}$ at $I_F = 10\ \text{mA}$ at $I_F = 50\ \text{mA}$ at $I_F = 150\ \text{mA}$	V_F	- - - -	0.715 0.855 1 1.25	V
Peak Reverse Current at $V_R = 75\ \text{V}$ at $V_R = 20\ \text{V}$ at $V_R = 75\ \text{V}$, $T_J = 150^\circ\text{C}$ at $V_R = 25\ \text{V}$, $T_J = 150^\circ\text{C}$	I_R	- - - -	1 25 50 30	μA nA μA μA
Total Capacitance at $V_R = 0\ \text{V}$, $f = 1\ \text{MHz}$	C_T	-	2	pF
Reverse Recovery Time at $I_{rr} = 0.1 \times I_R$, $I_F = I_R = 10\ \text{mA}$, $R_L = 100\ \Omega$	t_{rr}	-	4	ns

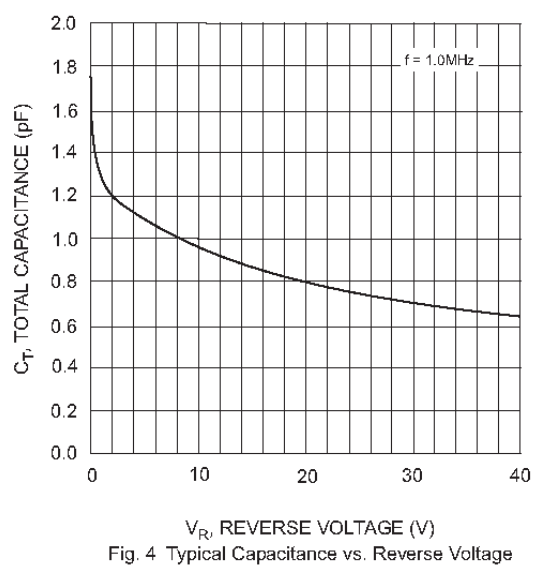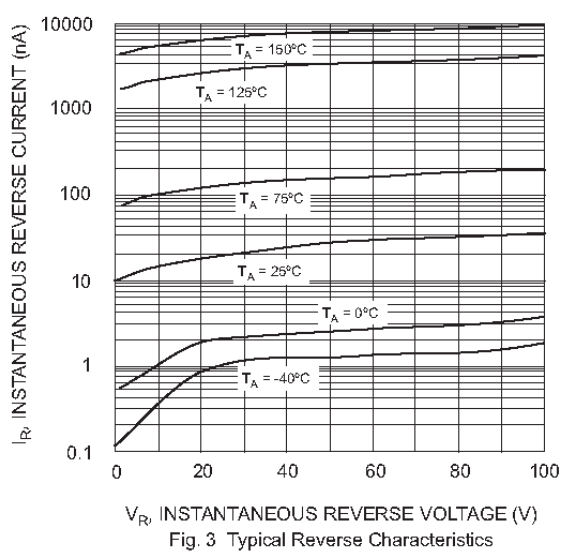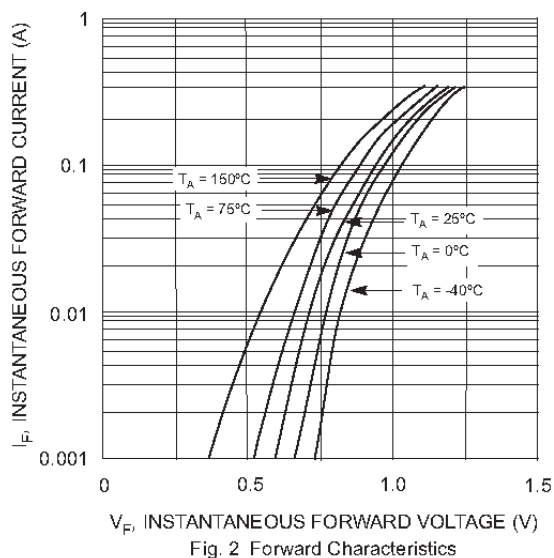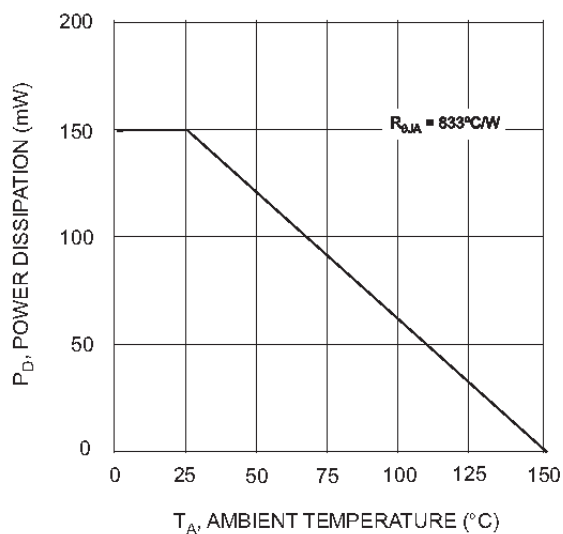

PACKAGE OUTLINE

Plastic surface mounted package: 2 leads

SOD-523

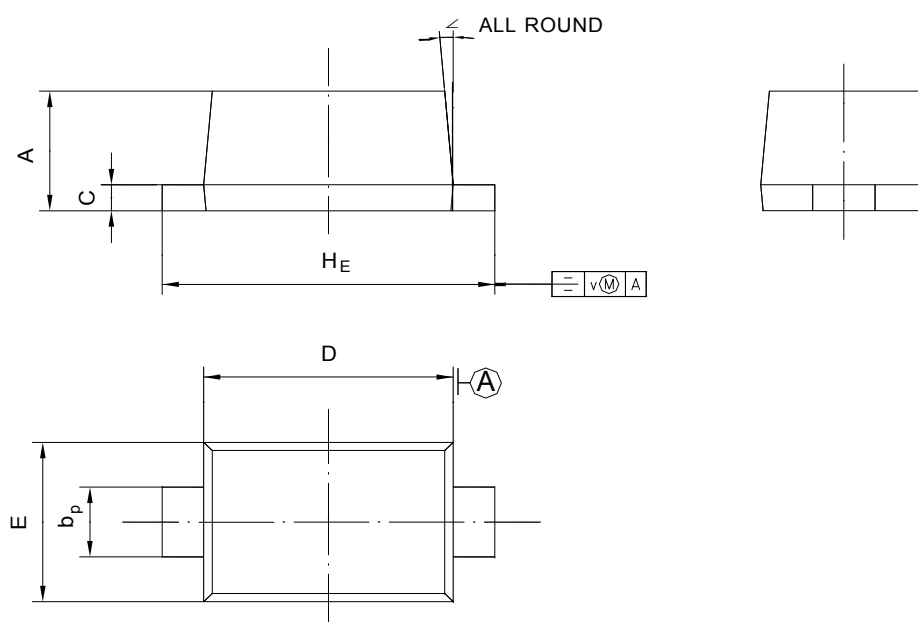

UNIT	A	b _p	C	D	E	H _E	V	∠
mm	0.68 0.58	0.4 0.3	0.135 0.100	1.25 1.15	0.85 0.75	1.7 1.5	0.1	5°

Important Notice and Disclaimer

Weforsemi reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Weforsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Weforsemi assume any liability for application assistance or customer product design. Weforsemi does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Weforsemi .

Weforsemi products are not authorized for use as critical components in life support devices or systems without express written approval of Weforsemi .